





Sash Cord Specification



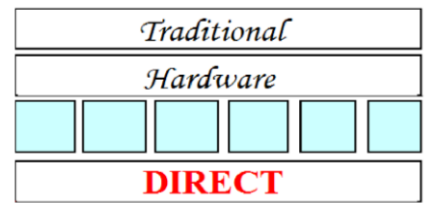


Red Spot Bleached Cotton Sash Cord

Traditional 'Red Spot' sash cord Excellent over pulley and in resisting abrasion




Diameter mm	Number	10m Hank Code No	100m Reel Code No	Breaking Load KG
6mm	4	THD294	THD295	85 KG
7mm	5	THD296	THD297	110 KG
8mm	6	THD298	THD299	125 KG

Wax Cotton Sash Cord with Poly Core

Traditional Wax Cotton sash cord has improved strength and reduced stretch provided by the polypropylene film core and durability from its 16-plait construction.




Diameter mm	Number	10m Hank Code No	100m Reel Code No	Breaking Load KG
5mm	3 (2c)	THD292	THD293	310 KG
6mm	4 (3c)	THD280	THD281	340 KG
7mm	5 (4c)	THD282	THD283	360 KG
8mm	6 (5c)	THD284	THD285	390 KG
10mm	8 (6c)	THD286	THD287	450 KG

Polyester Sash Cord

Rot and mildew proof, high tenacity man made fibre has a very low stretch, full UV degradation resistance.

Diameter mm	Number	10m Hank Code No	100m Reel Code No	Breaking Load KG
6mm	4	THD300	THD301	380 KG
8mm	6	THD302	THD303	770 KG

Nylon Sash Cord

This 8 plait synthetic fibre sash cord has very high strength and shock resistance, is hard wearing, durable and resistant to mildew. This man made fibre at its best.

Diameter mm	Number	10m Hank Code No	100m Reel Code No	Breaking Load KG
6mm	4	THD288	THD289	520 KG
8mm	6	THD290	THD291	1060 KG

UK Manufactured Sash Cord



Traditional Hardware Direct Ltd, Unit 2A Hall Moss Business Park, Bolton Road, Bull Hill,
Darwen, Lancashire BB3 2TT

Telephone Number: 01254 773945 / Fax Number: 01254 776986 / Email
info@traditionalhardwaredirect.com